

# AQUABION®

## Galvanic Water Treatment

### Without chemicals or external power supply




water treatment  
worldwide

## Technical sheet

# AQUABION® AB-H32



Pressure drop at type AB-H32

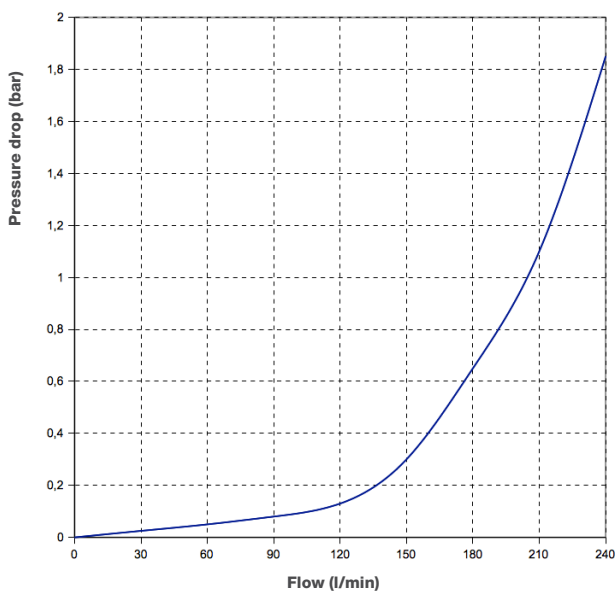

**Internal diameter** 1 1/4" DN32

Connection female

Length 330 mm

Body diameter 65 mm

Weight 4,81 kg

Maximum pressure 16 bar

Nominal flow at 2m/s 7,0 m<sup>3</sup>/h

Pressure drop at nominal flow 0,16 bar

**Material** **Body** **CW510L**

Internal parts Zinc anode Zn2 DIN EN 1179

Swirling body 1.4301

Sealing ring PTFE

Construction The body of the device consists of a single sleeve with two threaded nipples

Temperatures of use Warm water:  
- stored 85°C  
- circulating 85°C

**IMPORTANT:** AQUABION® must be installed in metal or plastic piping with metal piping before and after AQUABION® and with equipotential bonding.

