

# AQUABION®

## Galvanic Water Treatment

### Without chemicals or external power supply




water treatment  
worldwide

## Technical sheet

# AQUABION® AB-S15



Pressure drop at type AB-S15

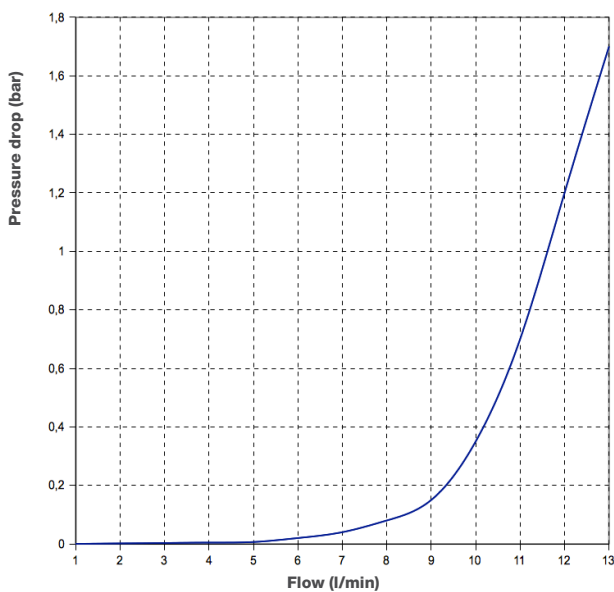

**Internal diameter** 1/2" DN15

Connection male

Length 120 mm

Body diameter 30 mm

Weight 0,436 kg

Maximum pressure 16 bar

Nominal flow at 2m/s 0,40 m<sup>3</sup>/h

Pressure drop at nominal flow 0,02 bar

**Material** **Body** CW510L

**Thread** CW510L

Internal parts Zinc anode Zn2 DIN EN 1179

Swirling body 1.4301

Sealing ring PTFE

Construction The body of the device consists of a single sleeve with two threaded nipples

Temperatures of use Warm water:  
- stored 85°C  
- circulating 85°C

**IMPORTANT:** AQUABION® must be installed in metal or plastic piping with metal piping before and after AQUABION® and with equipotential bonding.

